





QPHOTONICS, LLC

3830 Packard Road,
Suite 170,
Ann Arbor, MI 48108,
USA

Phone: 734-477-0133
Fax: 734-477-0166
Email: info@qphotonics.com
http://www.qphotonics.com

MODEL	QFLD-905-20SAX
PART NUMBER	SAMPLE



Parameter	Value	Units
Case Temperature	25	°C
Optical Output Power	20.6	mW
Threshold Current	25	mA
Operating Current	63	mA
Maximum Operating Current	69	mA
Operating Voltage	1.75	V
Monitor Current	0.15	mA
Center Wavelength	902.8	nm
Spectral Width	0.99	nm

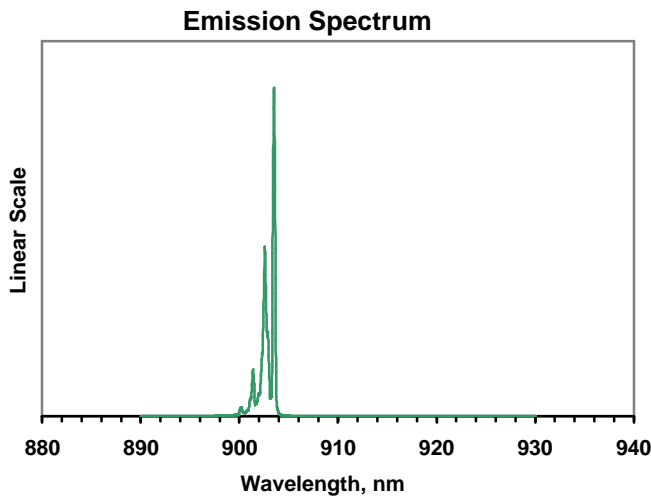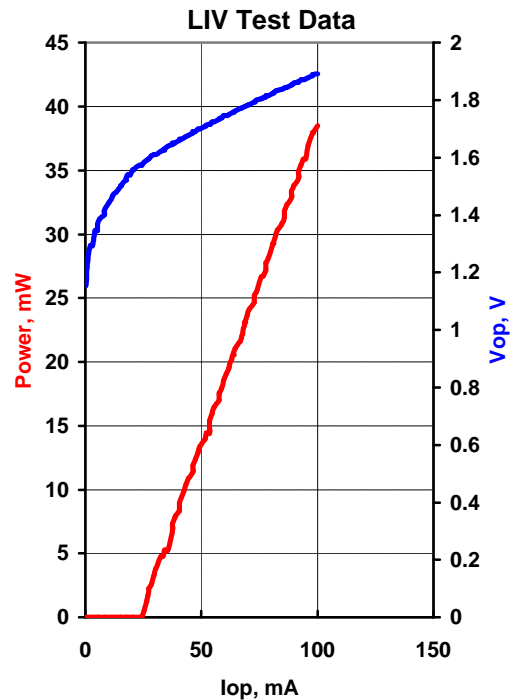

Fiber Type	None
NA	0.14
Connector	FC/PC

NOTE
This type of laser diodes must be used with temperature controlled mount.

Pin	Connection
1	LD Cathode
2	LD Anode, PD Cathode
3	PD Anode

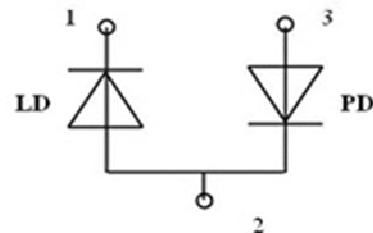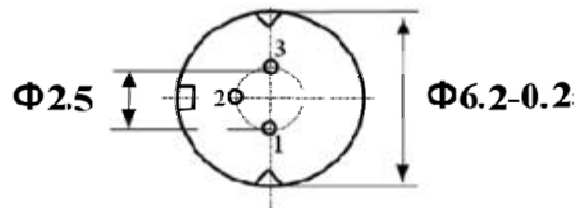

BOTTOM VIEW

Operator	
Date	