





QPHOTONICS, LLC

3830 Packard Road,
Suite 170,
Ann Arbor, MI 48108,
USA

Phone: 734-477-0133
Fax: 734-477-0166
Email: info@qphotonics.com
http://www.qphotonics.com

MODEL	QFLD-488-10SAX
PART NUMBER	SAMPLE



Parameter	Value	Units
Case Temperature	25	°C
Optical Output Power	10	mW
Threshold Current	31	mA
Operating Current	60	mA
Maximum Operating Current	70	mA
Operating Voltage	5.66	V
Monitor Current	-	mA
Center Wavelength	488	nm
Spectral Width	0.7	nm

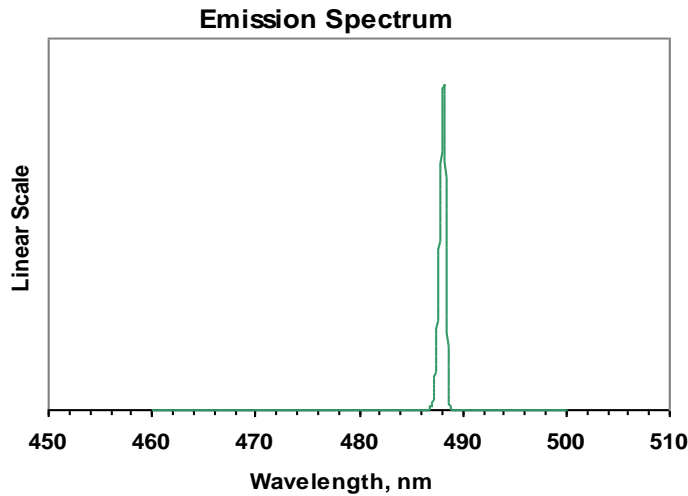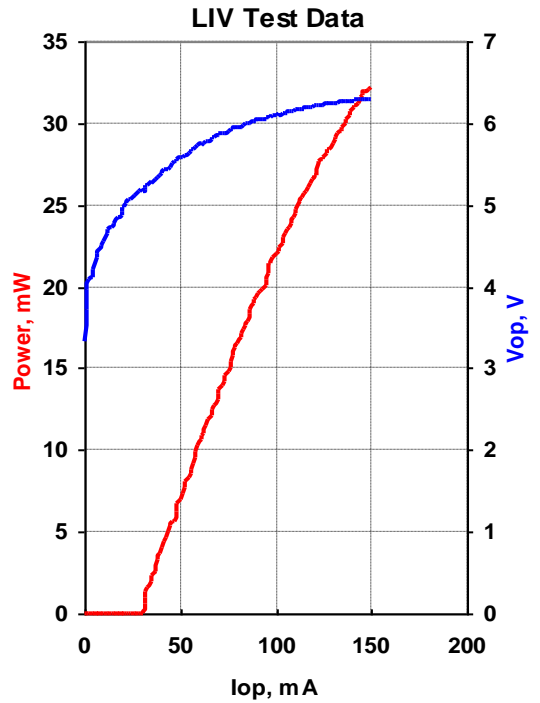

Fiber Type	S405-XP
NA	0.14
Connector	Optional

NOTE
This type of laser diodes must be used with temperature controlled mount.

Pin	Connection
1	LD Anode
3	LD Cathode

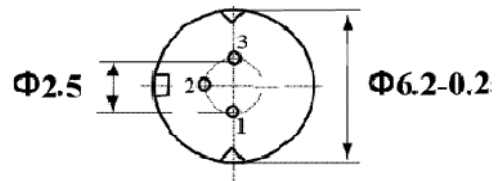

BOTTOM VIEW

Operator	NA
Date	